


Spot Leak Detection Sensor

MPC5126-SN

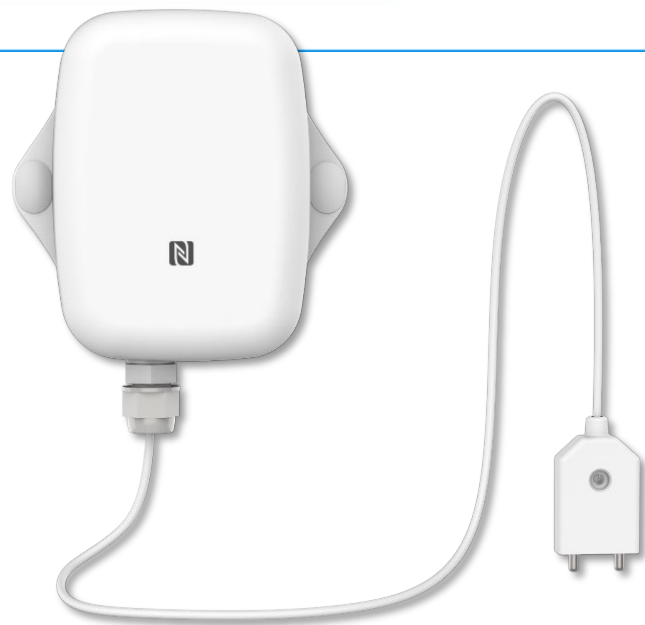

MPC5126-SN is a compact spot leakage detection sensor for detecting presence of water (or other liquids) and transmitting alarm using wireless technology. With this low power consumption technology, MPC5126-SN can work up to 5 years with 4000 mAh battery. Combining with MobiCom Pro gateway and IoT Cloud solution, users can manage all sensor data remotely and visually and receive alarms via mobile APP.

MPC5126-SN also integrates temperature and humidity sensors, which has a great use for applications such as pipe leakage monitoring, basement flooding, pump failure, etc.

◆ Features

- Detect the presence of liquids by a small water probe and based on the conductive principle
- Embedded with temperature and humidity sensors for environment monitoring
- Ultra-wide-distance transmission up to line of sight of 10km
- IP67 UV-resistant and waterproof enclosure for harsh environment applications
- Built-in 4000 mAh replaceable battery and works for more than 5 years without replacement
- Store locally 2, 800 historical records and support retransmission to prevent data loss
- Support MobiCom Pro D2D protocol to enable ultra-low latency and direct control without gateways

- Equipped with NFC for easily configuration
- Compliant with standard MobiCom Pro gateways and network servers
- Quick and easy management with MobiCom Pro IoT Cloud solution

◆ Specifications

Wireless Transmission	
Technology	Wireless, MobiCom Pro D2D
Frequency	CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16dBm(868 MHz)/20dBm(915 MHz)/19dBm(470 MHz)
Sensitivity	-137dBm @300bps
Mode	OTAA/ABP Class A
Measurement	
Leakage Detection	
Liquid Type	Conducting liquid
Trigger Condition	When liquid level reaches 5mm
Cable Length	1.5m (Customizable)
Temperature	
Range	-30°C to + 70°C
Accuracy	0°C to + 70°C (+/- 0.3°C), -30°C to 0°C (+/- 0.6°C)
Resolution	0.1°C
Humidity	
Range	0% to 100% RH
Accuracy	10% to 90% RH (+/- 3%), below 10% and above 90% RH (+/- 5%)
Resolution	0.5% RH
Operation	
Power On & Off	NFC, Power Button (Internal)
Configuration	NFC Configuration via Mobile App
Advanced Feature	MobiCom Pro D2D Controller, Data Storage, Data Retransmission
Physical Characteristics	
Power Supply	1 × 4000 mAh ER18505 Li-SOCL ₂ Battery (extendable to 2 batteries)
Battery Life*	10 years (10 min interval + 24 triggers per day)
Operating Temperature	-30°C to +70°C
Relative Humidity	0% to 100% (non-condensing)
Ingress Protection	IP67
Dimension	105.6 × 85.3 × 27 mm (4.16 × 3.36 × 1.06 in)

Installation	Wall Mounting
Approvals	
Regulatory	CE, FCC
Environmental	RoHS

* Tested under laboratory conditions and for guideline purposes only.



Hovedkontor / Salg

Hauge Møllevej 4
DK-3550 Slangerup
info@mobicom-pro.com
+45 50 80 00 90

Support

Man-Fre 08:30 – 16:00
+45 61 12 50 90
support@mobicom-pro.com